


# FREEZE-THAW CABINET

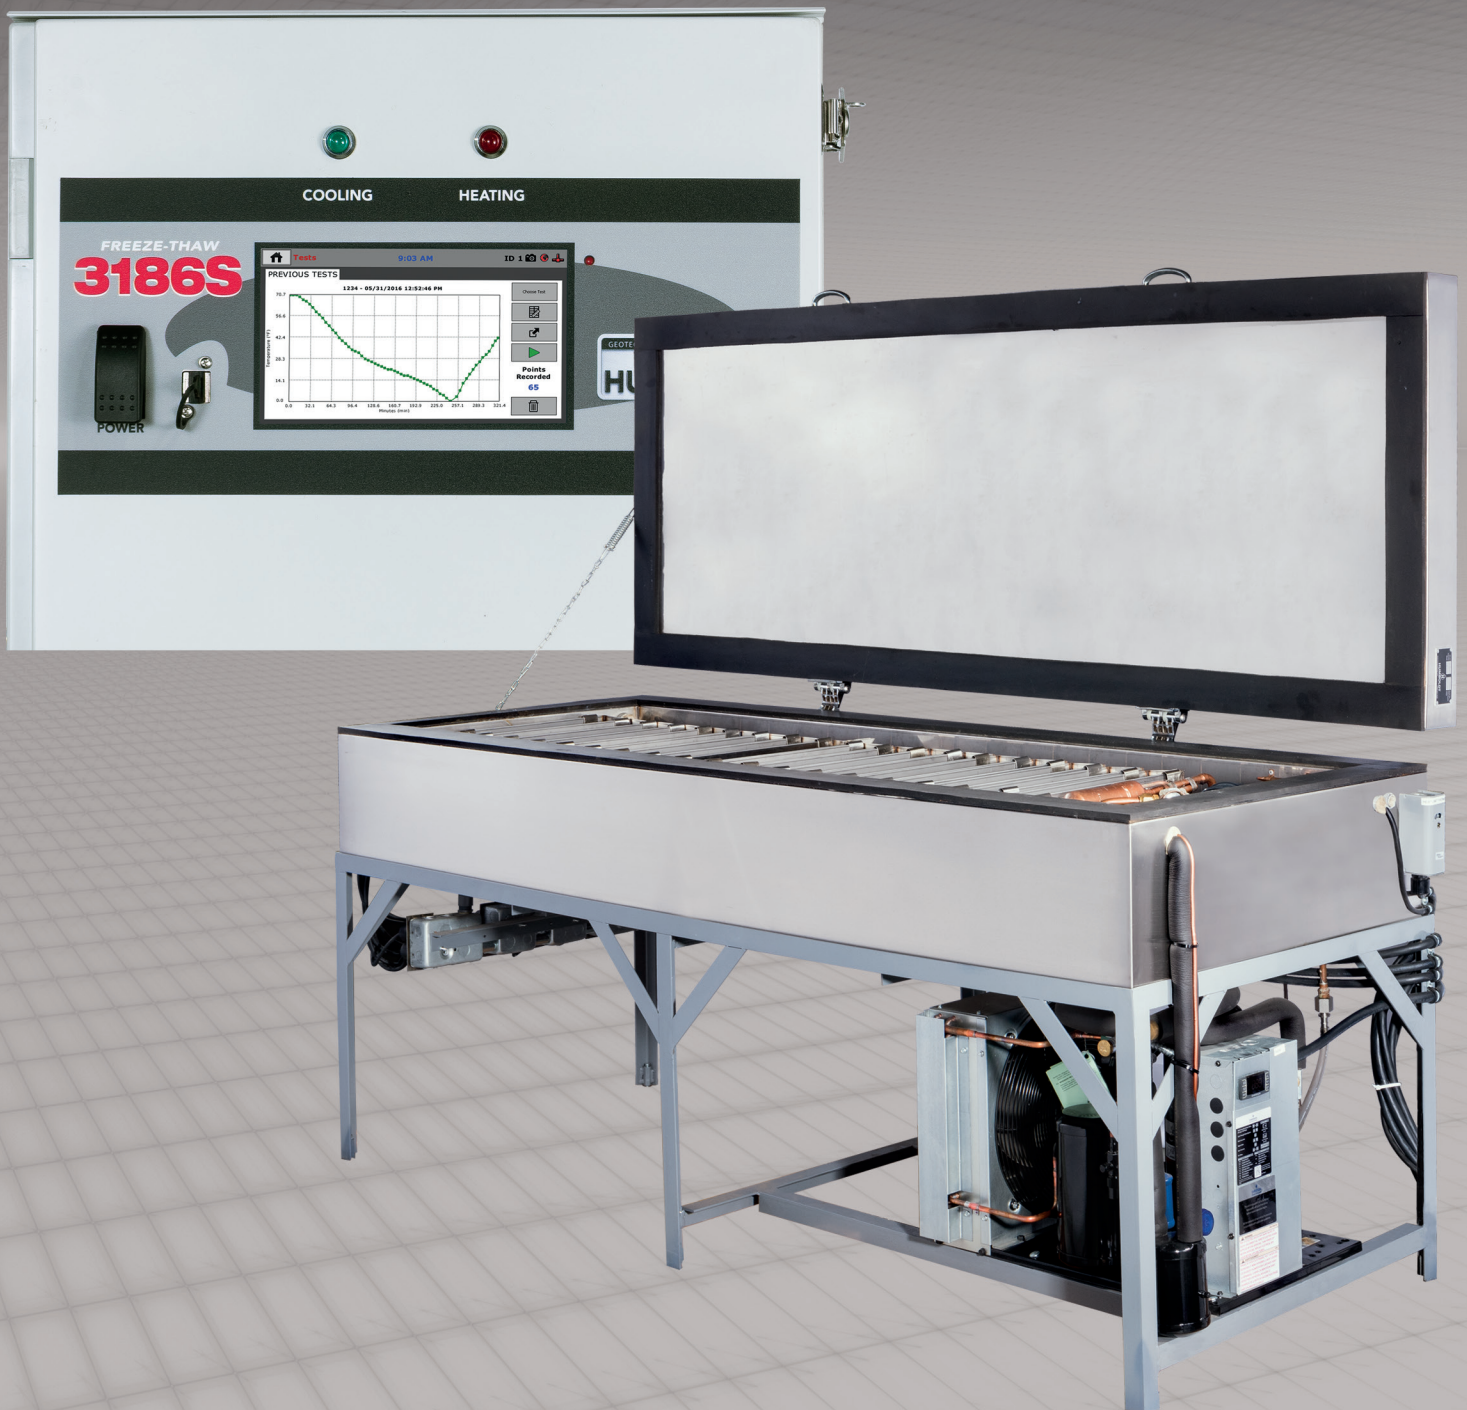

# ELITE SERIES Freeze-Thaw

Humboldt's Elite Series, Freeze-Thaw Cabinet is used to measure the resistance of concrete to deterioration caused by repeated cycles of freezing and thawing. The HC-3186S.4F Freeze-Thaw is designed to test up to eighteen 3" x 4" x 16" (76 x 102 x 406cm) concrete specimens simultaneously, with one being a control. Key features of the Freeze-Thaw include:

- Fully automatic operation frees operator to perform other lab duties.
- Allows users to establish field control using correlations between concrete strength and durability
- Permits the evaluation of variables in concrete properties and conditioning.
- Useful in the evaluation of the durability of aggregates, as well as the properties of admixtures.

Humboldt's touch-screen controller provides you with full, graphical monitoring of all testing functions in a stand-alone application. Now you can have full, finger-tip control and monitoring of all testing functions with Humboldt's touch-screen controller, found on our Freeze-Thaw Cabinet. The seven-inch, waterproof screen provides at-a-glance monitoring of testing functions, in a real-time graphical display, without the use of a computer.



HC-3186S.4F

ASTM C666, procedure A; AASHTO T161


# HC-3186S FREEZE-THAW

The HC-3186S Freeze-Thaw provides the following capabilities:

- User-created test control is possible, for changing freeze time, minimum temperature, maximum temperature and the number of cycles desired.
- Real-time, on-screen control and monitoring with graphing, allowing different data views to be chosen.
- Test data can be reviewed after a test is completed, which includes tabulation and graph views.
- Touch-screen interface for easy navigation.
- Test data can be via the front USB port and a flash drive. Reports can be generated by using Humboldt's HM-Data Download software and the exported data.

It is possible to have up to eight freeze-thaw cycles within a 24-hour period, however, the exact number of cycles is dependent upon the time required for the temperature at the center of the control prism to fall from 40 to 0°F (4.4 to -17.8°C) and then back to 40°F (4.4°C). The temperature at the center of the control specimen is controlled with the use of a 0.75HP (0.6KW) refrigeration unit and electric resistance heaters with fully automatic controls.

Current temperature of the control specimen can be checked by a glance at the large, 7" color display on the controller. It is also possible to track the temperatures of freeze-thaw cycles in real-time with a glance at the display. For corrosion resistance and long service life, the HC-3186S Freeze-Thaw features a stainless steel, 84"L x 32"W x 35.75"H (213 x 81 x 91cm) cabinet construction with 3" (76mm) insulation on all sides. The internal test compartment measures 74" x 26" x 6" (188 x 66 x 15cm). A 30-amp circuit is required for operation.

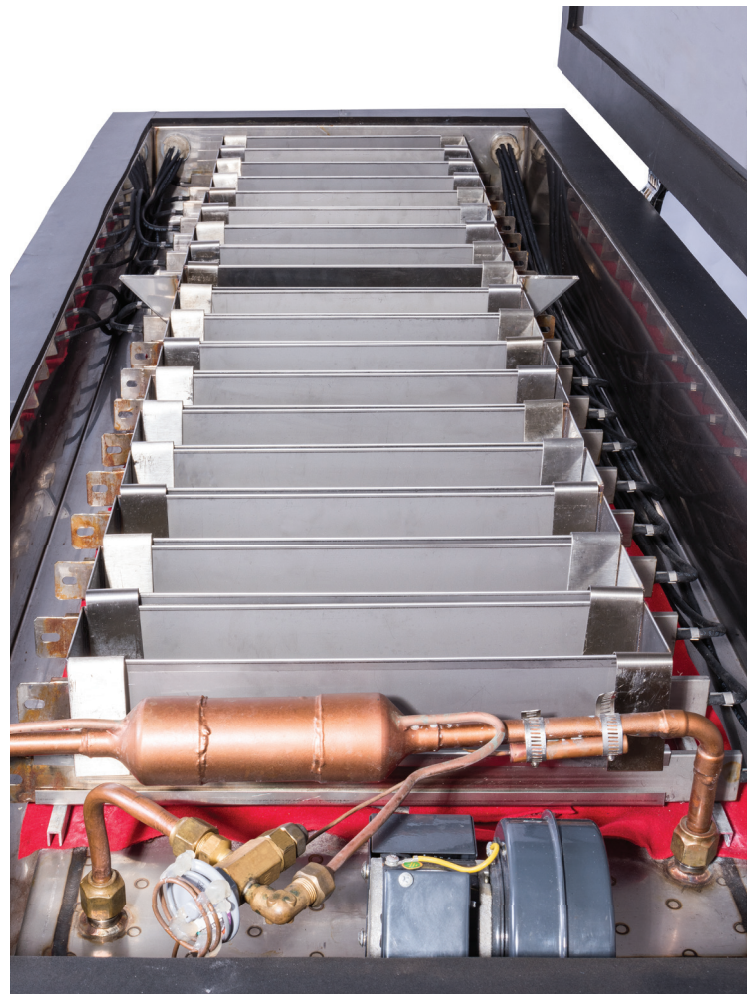

## Controller Specifications

Display	7" (178mm) VGA (480 x 800) Resistive-touch screen
Real-time test data	Graphic and tabulation
Processor	Dual 32-bit ARM
RAM	64MB
Memory, non-volatile	4GB
Data acquisition	1 Channel
Logging speed	1 reading every 5 minutes
Multi-test storage	1000
Points per test	3000
USB port	used to export data via thumb drive
Ethernet connection	for network connectivity
Firmware Update	Ethernet or flash drive

## Specifications

Condenser Operating Temperature Range	-30°F to 45°F (-34°C to 7°C) evap (R-404A) Designed for up to 110°F (43°C) ambient
Data channels	1
Data storage	1000 tests and up to 3000 readings per test
Cabinet Dims	84"L x 32"W x 35.75"H (213 x 81 x 91cm)
Controller Dims	22.25"H x 16.25 "W x 6"D (56 x 41 x 15cm)
Voltage	208/230V 50/60Hz Single Phase - 30amps
Net weight	1200 lbs (544kg)

### Freeze-Thaw Cabinet Includes:

(17) H-3185TA Stainless Steel Sample Trays,  
3" x 4" x 16.375" (76 x 102 x 406mm)

(1) H-3185TSA Stainless Steel Sample Tray with spout,  
3" x 4" x 16.375" (76 x

[www.humboldtmg.com](http://www.humboldtmg.com)

1.800.544.7220

