

ELITE SERIES Load Frames



NOTES


Elite Series load frames are sold as load frames only though shown here with typical triaxial setups.



Elite Series Load Frames

ASTM D1883, D2850, D2166, D4767 and D1559; AASHTO T193, T296, T297, T208, T245 and T246; BS 1377: Part 4, BS 1377 Part 7, BS 1377 Part 8, BS 598 Part 107

Humboldt's Elite Series Load Frames provide the materials testing lab with a choice of three, highly-versatile and precision-built loading systems covering a range of testing applications. The HM-5030 is the workhorse of the group, capable of handling any testing need up to 50kN or 11,000 lbf. The HM-5020

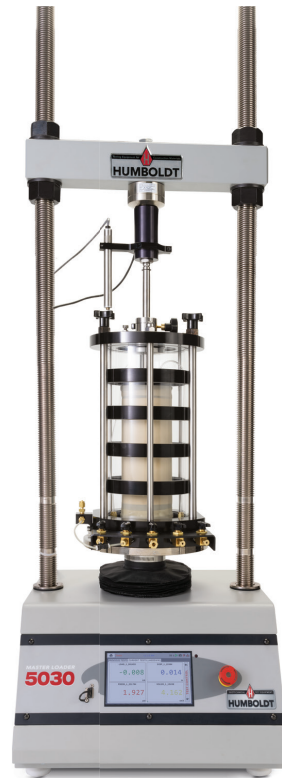

is a machine designed specifically for triaxial testing and other testing requirements up to 15kN or 3,000 lbf. and, the HM-5040, is a heavy-duty machine capable of handling testing requirements up to 100kN or 22,000 lbf.

These machines provide four (4) integral and independent data acquisition channels, which can be utilized in stand-alone configurations or accessed through a LAN-networked computer using Humboldt's Next Software.

Elite Series load frames are built with durable, high-quality components and feature the use of a stepper motor, precision gears and gear box to ensure smooth and reliable operation, as well as precise results.

In stand-alone mode, these load frames provide a 7" (178mm) touch-screen controller. These new waterproof, touch screens provide colorful, at-a-glance monitoring of testing functions without the use of a computer. Operators can see all the data in several formats at the machine while the test is running. Data can then be downloaded later to a computer in the lab, in the next room or at a different location, while also providing report generation capabilities from within Humboldt's NEXT software or our enhanced test-specific modules.



HM-5020 TRIAXIAL LOADER

Load capacity	3000 lbf (15kN)
Speed Range Testing:	0.00001 – 2.00000 in/min (0.00001 – 50.80000 mm/min)
Fast Approach:	2.25 in/min (57.1 mm/min)
Data channels	4
Platen Size / Travel	10" (254mm) / 4" (101mm)
Data storage	1000 tests and up to 3000 readings per test
Clearance, vertical	27" (686mm)
Clearance, horiz.	11" (286mm)
Voltage	110/220V 50/60Hz. 5.0 amps


A small-footprint, triaxial-specific load frame that provides the versatility, precision and durability found throughout Humboldt's Elite Series load frames.

The HM-5020 Triaxial Loader has been specifically designed to handle triaxial testing applications, including: UU, CU and CD triaxial and UC. From educational institutions and consulting firms to high-volume commercial labs and construction projects, the Triaxial Loader can handle any application with ease. Its heavy-duty design and precise stepper-motor control provide a stable platform for years of reliable service allowing the HM-5020 to perform any tests required up to its load capacity of 3000 lbf (15kN).

Like all Elite Series load frames, the HM-5020 is built around Humboldt's integral, 4-channel data logger with touch-screen control, which allows the load frame to be used as a standalone device capable of full test control and data logging. It can also be controlled by a networked computer at any location with access to the network.

Triaxial Loader, 110/220V 50/60 Hz HM-5020.3F

Shipping wt. 120 lb (54kg)

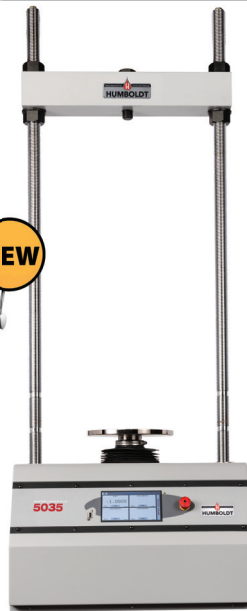

HM-5030 MASTER LOADER

Load capacity	11000 lbf (50kN)
Speed Range	0.00001 – 2.00000 in/min
Testing:	(0.00001 – 50.80000 mm/min)
Fast Approach:	2.25 in/min (57.1 mm/min)
Data channels	4
Platen Size / Travel	10" (254mm) / 4" (101mm)
Data storage	1016 tests and up to 3000 readings per test
Clearance, vertical	40" (1000mm)
Clearance, horiz.	15" (381mm)
Voltage	110/220V 50/60Hz. 5.0 amps

Designed for applications requiring multi-purpose loading systems, such as road construction projects in either mobile or fixed labs, educational institutions and consulting firms, the HM-5030 Master Loader is ideal for just about any application from road construction to high-volume commercial and educational laboratories.

While the HM-5030 has been specifically designed for soil testing labs conducting multiple testing operations including: UU, CU and CD triaxial, UC, CBR and LBR. It is also perfect for running Marshall, Hveem, TSR and SCB asphalt tests as well. Its heavy-duty design and precise stepper-motor control provide a stable platform for years of reliable service allowing the HM-5030 to perform any tests required up to its load capacity of 11000 lbf (50kN).

Like all Elite Series load frames, the HM-5030 is built around Humboldt's integral, 4-channel data logger with touch-screen control, which allows the load frame to be used as a standalone device capable of full test control and data logging. It can also be controlled by a networked computer at any location with access to the network.

Master Loader, 110/220V 50/60 Hz HM-5030.3F
Shipping wt. 300 lb (136kg)

HM-5035 MASTER LOADER PLUS

Load capacity	15000 lbf (68kN)
Speed Range	0.00001 – 2.20000 in/min
Testing:	(0.00001 – 55.00000 mm/min)
Fast Approach:	
Data channels	4
Platen Size / Travel	10" (254mm) / 4" (101mm)
Data storage	1000 tests and up to 3000 readings per test
Clearance, vertical	44" (1118mm)
Clearance, horiz.	21" (533mm)
Voltage	110/220V 50/60Hz. 5.0 amps

Humboldt's New HM-5035.3F Master Loader Plus is ideal for just about any application from road construction to high-volume commercial and educational laboratories, which require higher loading capacities up to 15000 lbf (68kN), such as those involving larger sized samples and samples comprised of aggregate/asphalt/soil or mixtures. It's wider stance and large vertical and horizontal clearances allows it to accommodate much larger samples. Its heavy-duty design and precise stepper-motor control provide a stable platform for years of reliable service allowing the HM-5035.3F to perform any tests required up to its load capacity of 15000 lbf (68kN). Like all Elite Series load frames, the HM-5035.3F is built around Humboldt's integral, 4-channel data logger with touch-screen control, which allows the load frame to be used as a standalone device capable of full test control and data logging. It can also be controlled by a networked computer.

Master Loader Plus, 110/220V 50/60 Hz HM-5035.3F
Shipping wt. 725 lb (329kg)

HM-5040 GRAND LOADER

Load capacity	22000 lbf (100kN)
Speed Range	0.00001 – 0.49999 in/min
Testing:	(0.00001 – 12.674 mm/min)
Fast Approach:	0.5 in/min (12.7 mm/min)
Data channels	4
Platen Size / Travel	10" (254mm) / 4" (101mm)
Data storage	1000 tests and up to 3000 readings per test
Clearance, vertical	44" (1118mm)
Clearance, horiz.	21" (533mm)
Voltage	110/220V 50/60Hz. 5.0 amps

The HM-5040 Grand Loader is ideal for just about any application from road construction to high-volume commercial and educational laboratories, which require higher pressure loading capacities up to 22000 lbf (100kN), such as those involving larger sized samples and samples comprised of rock and rock/soil mixtures. It's wider stance and large vertical and horizontal clearances allows it to accommodate much larger sample-size cells. Its heavy-duty design and precise stepper-motor control provide a stable platform for years of reliable service allowing the HM-5040 to perform any tests required up to its load capacity of 22000 lbf (100kN). Like all Elite Series load frames, the HM-5040 is built around Humboldt's integral, 4-channel data logger with touch-screen control, which allows the load frame to be used as a standalone device capable of full test control and data logging. It can also be controlled by a networked computer HM-5040 includes a storage base with casters.

Grand Loader, 110/220V 50/60 Hz HM-5040.3F
Shipping wt. 725 lb (329kg)



Humboldt Mfg. Co.
www.humboldtmgf.com
875 Tollgate Road
Elgin, Illinois 60123 U.S.A.

U.S.A. Toll Free: 1.800.544.7220
Voice: 1.708.456.6300
Fax: 1.708.456.0137
email: hmc@humboldtmgf.com