


# Slake Durability Apparatus, 120V 60Hz



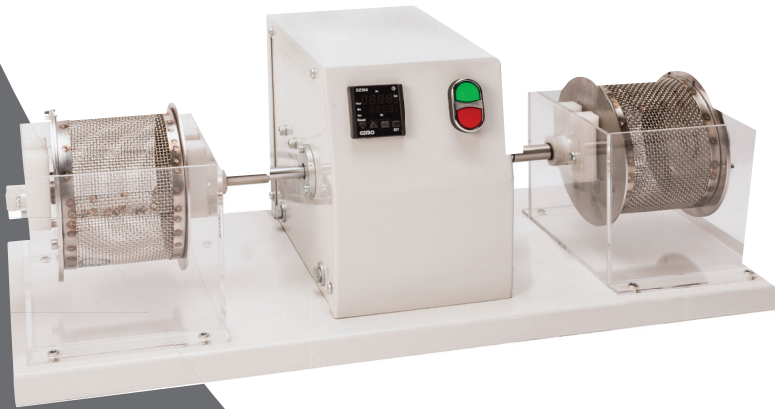

# CONTENTS

## **Quick Start Guide**

Introduction	4
Apparatus	4
Procedure	6

## **Introduction**

The Slake Durability Index Test is intended to assess the resistance offered by rock samples to weakening and disintegration when subject to changes in water content. Device an important part of tests to determine the weathering properties of rock when exposed on embankments and in open cast mining, as well as in many other applications.

## **Apparatus**

**The apparatus consists essentially of the following:**

**2.1** A pair of test drum assemblies manufactured in brass, comprising a 2 mm standard mesh cylinder of unobstructed length 100 mm and diameter 140 mm with a solid fixed base. The other face of the drum is removable to facilitate loading a sample for test.

**2.2** A pair of transparent water tanks with suitably positioned horizontal axis drive shafts. The design is such that drum assemblies can be easily fitted to and removed from the tank.

**2.3** A motor assembly, including a drive shaft rotating at 20 rpm  $\pm$  1 rpm mounted on a base board capable of accepting the standard pair of tank drum assemblies, automatically inter-couple to form their own driving chain.

**2.4** Electrical supply

## Safety

Whilst the test is in operation do not remove any covers or attempt to adjust any part of the machine. Ensure all moving parts are thoroughly secured before attempting any maintenance.

## Electrical Safety

**Warning:** Before removing any covers or performing maintenance repair and service, isolate from electrical supply by removing mains plug. Where mains supply is required during these activities, only competent persons should perform the work.

It is advised that this machine be connected via a GFCI outlet (not supplied), and it should operate if earth leakage current exceeds 0.03 amps.

The power cable is coded as follows:

**Note:** exercise extreme caution when using the machine with wet hands. Dry hands before operating machine.

### Portable Appliance Tests (PAT)

This product has been tested for electrical safety prior to sale.

Organizations have an obligation to ensure equipment is maintained and is safe for use. Regular PAT testing is one means of ensuring equipment continues to be electrically safe.

**Important:** Do not connect PAT leads to sensitive components such as PCBs, control switches and the like.

If in doubt as to the most suitable connection point contact Humboldt Service Department for assistance.

### **3. Procedure**

**3.1** 10 rock specimens each weighing 40 to 60 g, giving a total weight of 450 to 550 g, are selected to represent the sample.

**3.2** The selected specimens are placed in the drum and dried to constant weight at a temperature of 105°C (this usually requires 3 to 12 hours in an oven).

**3.3** The drum assembly for each test is placed in the related water tank and coupled in series to the motor drive unit.

Note: the drum assemblies are marked 'left hand' and 'right hand' and should be placed accordingly, relative to the motor drive unit.

**3.4** The tank is filled with slaking fluid to within 20 mm of the drum axle (indicated by a mark on the tank). The test is immediately set in motion for a period of 10 minutes.

**3.5** At the end of the period the drive is immediately switched off, the drum assembly removed from the tank, and the assembly with the specimens dried to constant weight at 105°C.



Humboldt Mfg. Co.  
875 Tollgate Road  
Elgin, Illinois 60123 U.S.A.

U.S.A. Toll Free: 1.800.544.7220  
Voice: 1.708.468.6300  
Fax: 1.708.456.0137  
Email: [hmc@humboldtmfg.com](mailto:hmc@humboldtmfg.com)

